

100kW max.
BOILER OUTPUT*

Alarm Boiler Pump technical spec

PART NO: FP2949 euro

OIL & GAS FIRED CONDENSING BOILERS

HIGH EFFICIENCY GAS FURNACE

AIR CONDITIONING & REFRIGERATION SYSTEMS

DESCRIPTION:

When you need to remove a lot of condensate water fast, the 0.5L Alarm Boiler Pump is the perfect solution. This reliable and stylish pump has market leading reliability and is ideal when space is limited. The 0.5L Alarm Boiler Pump is ideal for the domestic boiler market and features an audible alarm, with auto cut-out. The pump accepts PH levels as low as 2.7.


FEATURES:

- Tank capacity: 0.5L
- Suitable for condense as low as pH 2.7
- Audible alarm, with auto cut-out
- Incorporated back-plate for vertical mounting
- Connecting cable: 2m with euro plug
- Fire retardant plastics
- 3 inlet positions: Ø 2 x 27mm, Ø 1 x 20mm push out
- Outlet size: 6m x 10mm
- Push-in plug
- Pipe adaptor for discharge hose

- 6m x 10mm pvc discharge hose
- Maximum water temperature: 60°C

PERFORMANCE:

- Water flow rate: 180 L/hr max.
- Discharge head: 3.5m

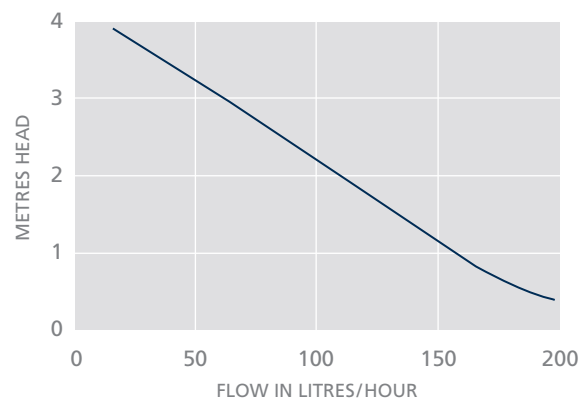

cont.

*1kW = 3400 BTUs



For further information please visit
www.aspenpumps.com
 or contact +44 (0)1323 848842

Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, we reserve the right to change specifications at any time.

designed by engineers for engineers

Alarm Boiler Pump

technical spec

PART NO: FP2949 euro

DIMENSIONS:

125mm (h) x 205mm (w) x 120mm (d)

Weight: 1.4kg

POWER SUPPLY:

- 230V AC 50W
- Pump has a pre-wired safety switch
- Pre-wired safety switch 230V, 3.0A max.

ELECTRICAL CONNECTION:

Brown: Live
Blue: Neutral
Green/yellow: Earth
2 x Black: Safety switch

ACCESSORIES:

- Acid Neutraliser



Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, we reserve the right to change specifications at any time.

For further information please visit
www.aspenpumps.com
or contact +44 (0)1323 848842

designed by engineers for engineers