

## TECHNICAL SPECIFICATIONS


- Tank capacity: 4 litre or 12 litres
- Self-priming
- 8.5 metres discharge head
- Water flow rate: 780 litres per hr max
- Pump rating: 0.38A 230V AC
- Connecting cable: 2 metres
- Pre-wired safety switch 4.0A max

### Macerator 4 litre


- 2 inlet positions in deck: 40mm ø & 55mm ø
- Outlet size: 10mm

### Macerator 12 litre

- 2 inlet positions in deck: 40mm ø & 55mm ø
- Additional 3/4" inlet connector in tank
- Outlet size: 10mm

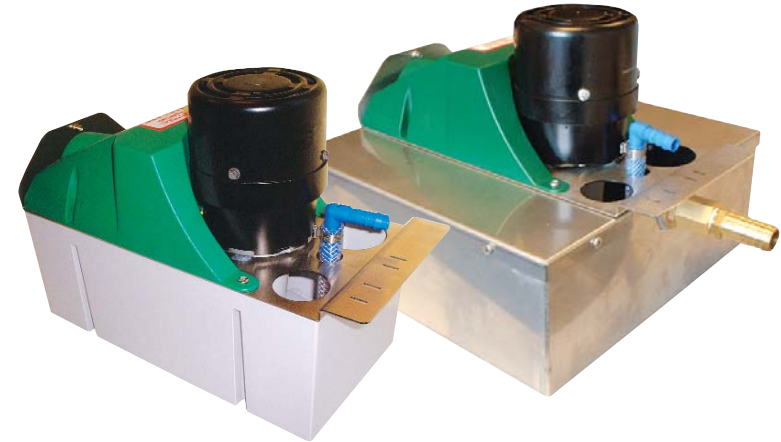

### MACERATOR PERFORMANCE

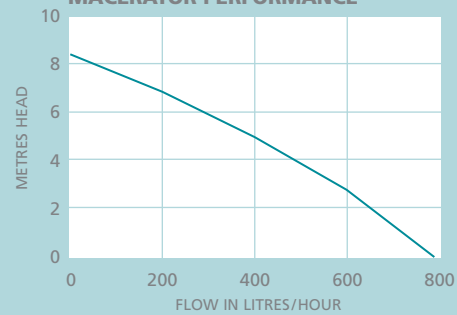

### SERVICE GUIDE

Flush the pump thoroughly with anti-bacterial wash every 6 months to avoid sludge build-up in the pump housing.

### ELECTRICAL CONNECTIONS

<b>Brown</b>	Live
<b>Blue</b>	Neutral
<b>Green/Yellow</b>	Earth
<b>2x Black</b>	Safety switch

### PUMP DIMENSIONS

Product	Height	Width	Depth	Weight
<b>MACERATOR 4 LITRE</b>	230mm	335mm	150mm	3.8kg
<b>MACERATOR 12 LITRE</b>	230mm	335mm	310mm	6.8kg

The Macerator pump is designed to collect condensation and defrost water from food hall cabinets. It has an internal filter blade to stop the pump from clogging with food debris between maintenance visits and will discharge the water to a head of 8.5 metres.

The internal pre-wired safety float is a low current switch to stop the drain down cycle in the event of pump failure. The pump is operated via two internal float switches.

**The Macerator pump comes in two different tank sizes: The 4 litre, made from plastic and the 12 litre, made in stainless steel.**