

TECHNICAL SPECIFICATIONS

- **Mini Orange** Power supply: 230V-16W
- **Maxi Orange** Power supply: 230V-21W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O, N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Fully potted
- Thermally protected
- CE marked


Mini Orange

- Water flow rate: 14ltrs/hour at zero head
- Maximum recommended head: 8 metres
- 23dB(A) @ 1 metre head


Maxi Orange

- Water flow rate: 37ltrs/hour at zero head
- Maximum recommended head: 20 metres
- 35dB(A) @ 1 metre head


MINI ORANGE PERFORMANCE

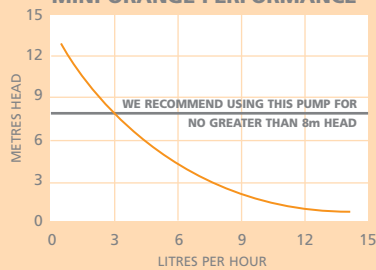

MAXI ORANGE PERFORMANCE

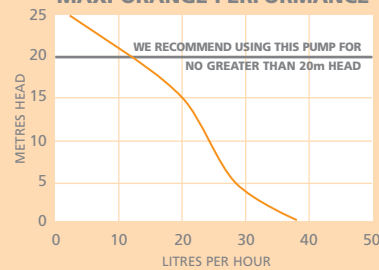

SYSTEM LOCATION

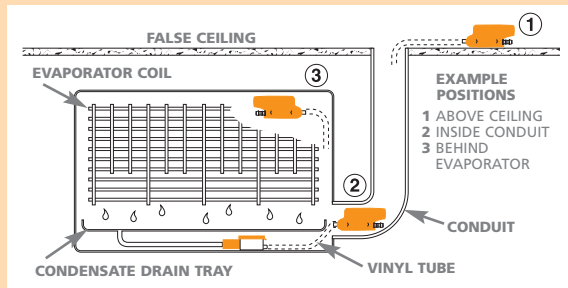

PUMP DIMENSIONS

Product	Height	Width	Depth	Weight
MINI ORANGE	51mm	107mm	39mm	0.25kg
MAXI ORANGE	66mm	122mm	44mm	0.45kg



MINI ORANGE & MAXI ORANGE

Aspen's range of mini pumps have been designed to make the installation of a pump possible, where the latest generation of wall mounted evaporators are becoming smaller and smaller.

The Aspen Mini & Maxi Orange pumps are designed to be installed:

- above the false ceiling where possible
- behind wall mounted evaporators
- in plastic conduit

Within the Orange kit there are two reservoirs to choose from, which must sit flat and horizontal. One allows you to connect directly to the drain hose of the evaporator and the second reservoir can be placed directly into a condensate tray.

By connecting the drain hose to the reservoir and placing the pump drive unit within the evaporator, condensate water can be pumped away to a suitable drain.

