

# Mini Tank Pump

## technical spec



PART NO: FP1056

### DESCRIPTION:

The pump is designed to collect condensate water from air conditioning systems and discharge it up to a recommended maximum 10 metres head. The internal safety switch is a low current switch to stop the air conditioning system in the event of pump failure. The pump is operated from an internal float switch.

### FEATURES:

- Tank capacity: 0.24L
- High level safety cut-out
- Wall, floor and in pan use
- Connecting cable: 2m
- Fire retardant plastics
- Inlet seal fits most standard overflow pipe sizes
- Outlet size: 6mm
- Maximum water temperature: 40°C
- Maximum noise level: 35 dB(A) at 1m
- Pump has a pre-wired safety switch
- Pump rating 0.15A, 230V AC, 16W
- Safety switch: 3A maximum


### DIMENSIONS (INCLUDING BRACKET):

70mm (h) x 180mm (w) x 90mm (d)

Weight: 0.57kg

### PERFORMANCE:

- Water flow rate: 34ltrs max./hr
- Discharge head: 10m max.

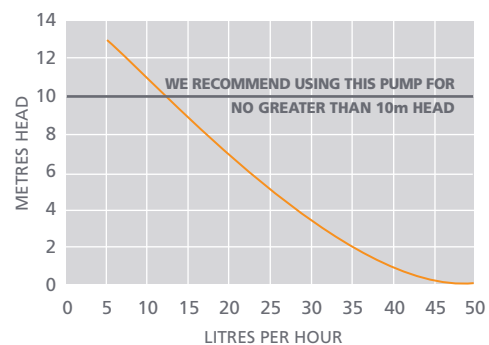

### POWER SUPPLY:

- 230V AC 16W
- 1PH 50/60 Hz
- 3A alarm wires, normally closed
- Double insulated

### ELECTRICAL CONNECTION:

Live	Brown
Neutral	Blue
Safety switch	2x Black

### IMPORTANT:

Not suitable for condenser boilers



For further information please visit  
[www.aspenpumps.com](http://www.aspenpumps.com)  
or contact +44 (0)1323 848842