


silent+

MINI AQUA

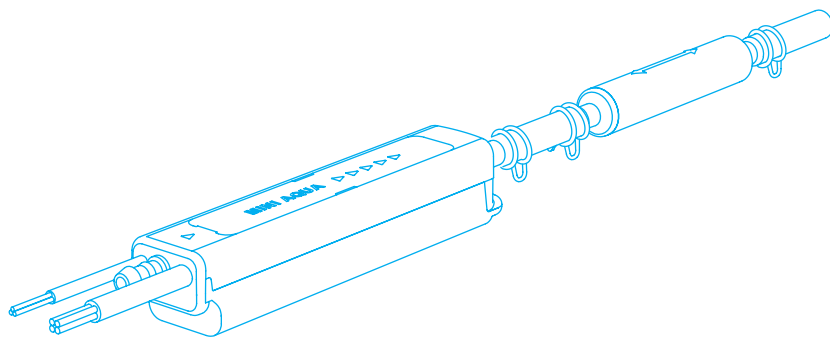

PART NO. FP3326

TECHNICAL SPECIFICATION

GB

DESCRIPTION:

The Silent+ Mini Aqua® allows great installation flexibility. It gives optimum performance and quietest operation.

- Low noise, high performance motor
- Acoustic damper
- Anti-vibration tubing
- Plug and play connection
- Clear reservoir for easy inspection
- Quietest in it's class

IN THE BOX:


- 1 x Assembled Silent+ Mini Aqua® pump including blue discharge tube with connector
- 1 x Assembled reservoir including lid and sensor cable
- 1 x Acoustic damper
- 1 x Anti-vibration bracket
- 1 x Inlet hose
- 1 x 90° hose connector
- 1 x Drain tray connector
- 1 x Vinyl tube
- 1 x Breather tube
- 2 x Velcro strips
- 6 x cable ties

SPECIFICATIONS:

- Pump rating: 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 51mm (h) x 107mm (w) x 39mm (d)
- Weight: 0.25kg

PERFORMANCE:

- Water flow rate: 14L/hr at zero head
- Maximum recommended head: 10 metres
- 21dB(A) @ 1 m

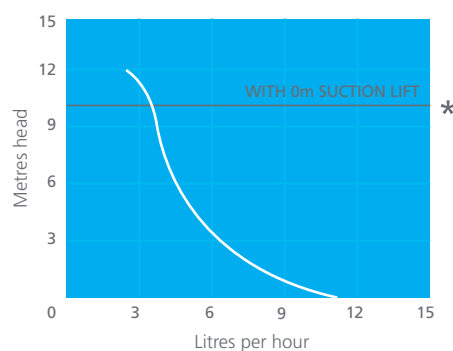

* We recommend using this pump for no greater than 10m head