

Technical Specification

silent+ MINI LIME


Part No: SLIMLINE: 3312 ARTIPLASTIC: 3315 BBJ: FP3316 INOAC: FP3317



5/10

Performance:

- Water flow rate: 11ltrs/hour at zero head
- Maximum recommended head: 10 metres
- 21dB(A) @ 1 metre

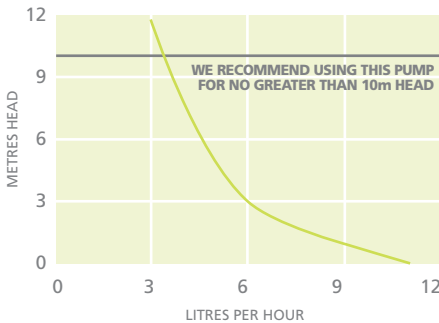

VERTICAL PUMPING HEAD	HORIZONTAL			
	30m	60m	90m	100m Max
3m	7.6	7.6	7.6	Ltr/Hr
2m	8.3	8.3	8.3	Ltr/Hr
1m	8.5	8.5	8.5	Ltr/Hr

Other Features:

- Hall effect semi conductor level sensors, with high level safety
- Fully potted
- Thermally protected
- CE marked

In The Box:

- Mini Lime pump
- Acoustic damper
- Breather tube
- Green discharge tube with connector
- Internal conduit sleeve
- Conduit front and back
- Elbow kit
- Trunking

- Ceiling plate
- Inlet hose, rawl plugs and screws
- Cable ties

Power Supply:

- 230V AC, 15W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V



Dimensions:

Height: 79mm
 Width: 99mm
 Depth: 44mm
 Weight: 0.31kg

Systems Available:

Slimline	Ivory	FP3312
Artiplastic	Ivory	FP3315
BBJ	Ivory	FP3316
Inoac	Ivory	FP3317

Installation:

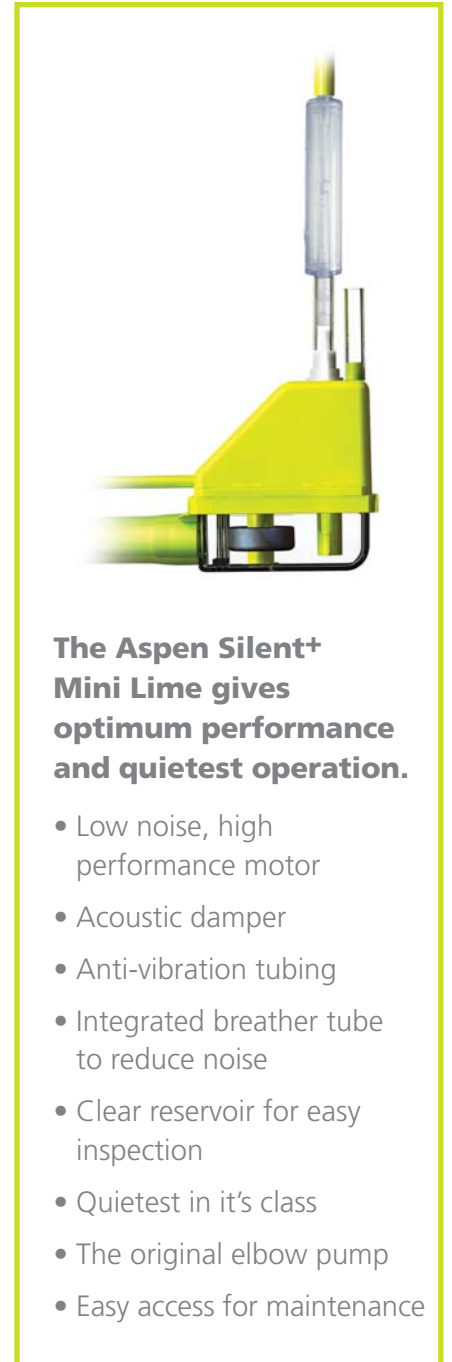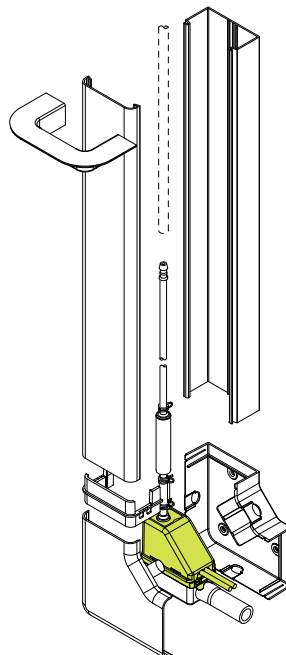

The Aspen Silent+ Mini Lime gives optimum performance and quietest operation.

- Low noise, high performance motor
- Acoustic damper
- Anti-vibration tubing
- Integrated breather tube to reduce noise
- Clear reservoir for easy inspection
- Quietest in it's class
- The original elbow pump
- Easy access for maintenance



Apex Way Hailsham
 East Sussex BN27 3WA
 T: +44 (0)1323 848842
 F: +44 (0)1323 848846
 sales@aspenspumps.com
www.aspenspumps.com