

Technical Specification

silent+ MINI ORANGE

Part No: FP3313



5/10

Performance:

- Max. water flow rate: 12ltrs/hour at zero head
- Maximum recommended head: 10 metres
- 21dB(A) @ 1 metre

Other Features:

- Hall effect semi conductor level sensors, with high level safety
- Fully potted
- Thermally protected
- CE marked

In The Box:



- Mini Orange pump
- Acoustic Damper
- Reservoir
- Submersible reservoir
- Inlet tube
- Orange inlet tube and anti-vibration tube
- 6-pin socket lead assembly
- Cable ties and self-adhesive velcro strips
- Drain tray connector

Power Supply:

- 230V AC, 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O., N.C. contacts rated @ 5A inductive at 230V



Dimensions:

Height: 51mm
 Width: 107mm
 Depth: 39mm
 Weight: 0.25kg

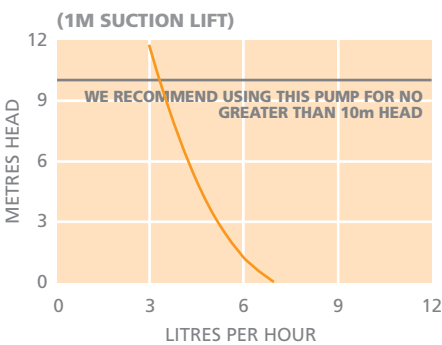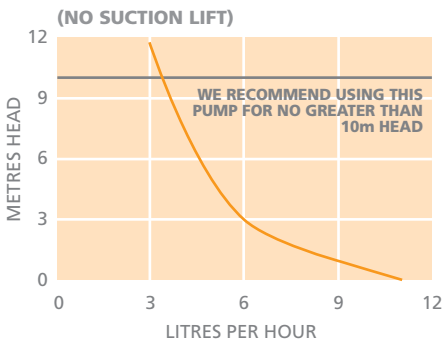

VERTICAL SUCTION	HORIZONTAL			
	30m	60m	90m	100m Max
3m	7.2	7.0	6.6	Ltr/Hr
2m	7.3	7.1	7.1	Ltr/Hr

System Location:

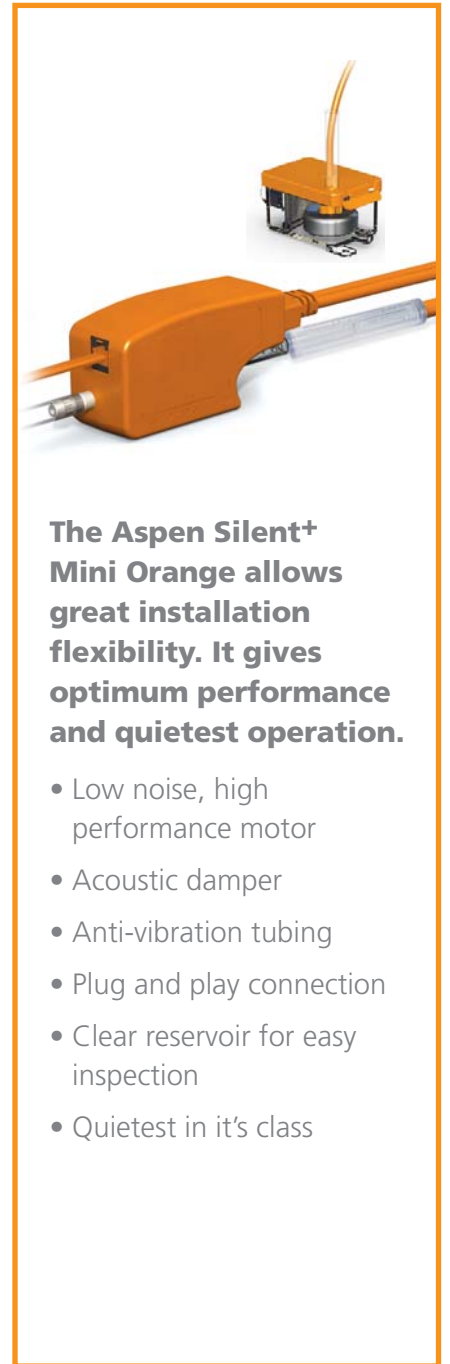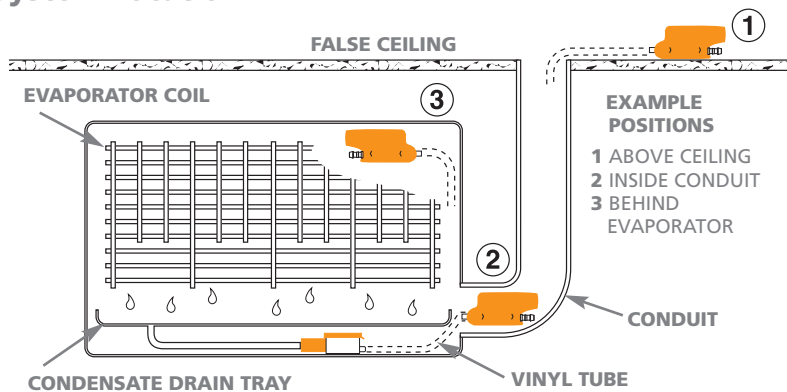

The Aspen Silent+ Mini Orange allows great installation flexibility. It gives optimum performance and quietest operation.

- Low noise, high performance motor
- Acoustic damper
- Anti-vibration tubing
- Plug and play connection
- Clear reservoir for easy inspection
- Quietest in it's class



Apex Way Hailsham
 East Sussex BN27 3WA
 T: +44 (0)1323 848842
 F: +44 (0)1323 848846
 sales@aspenspumps.com
 www.aspenspumps.com