

200kW max.
BOILER OUTPUT*

Hi-Capacity Boiler Pump

technical spec

PART NO: FP2951 euro

- OIL & GAS FIRED CONDENSING BOILERS
- HIGH EFFICIENCY GAS FURNACE
- AIR CONDITIONING & REFRIGERATION SYSTEMS

DESCRIPTION:

The 2L Hi-Capacity Boiler Pump is designed to collect condensate from high efficiency condensing boilers and discharge it up to 4.6m. Using internal float switches the pump automatically removes the condensate when required.


FEATURES:

- Tank capacity: 2L
- Suitable for condense as low as pH 2.7
- Clear deck for quick and easy inspection
- Continuously rated
- Incorporated back-plate for vertical mounting
- Connecting cable: 2m with euro plug
- Pipe adaptor for discharge hose
- Fire retardant plastics
- 2 inlet positions: Ø 27mm
- Outlet size: 6mm & 10mm
- High level safety cut-out

- Maximum water temperature: 60°C
- 6m x 10mm pvc discharge hose

PERFORMANCE:

- Water flow rate: 288 L/hr max.
- Discharge head: 4.6m max. or 30m horizontal

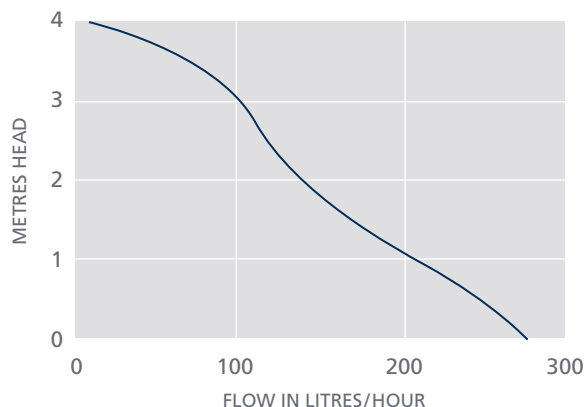

cont.

*1kW = 3400 BTUs



For further information please visit
www.aspenpumps.com
 or contact +44 (0)1323 848842

Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, we reserve the right to change specifications at any time.

Hi-Capacity Boiler Pump

technical spec

PART NO: FP2951 euro

DIMENSIONS:

160mm (h) x 235mm (w) x 140mm (d)

Weight: 1.75kg

POWER SUPPLY:

- 230V AC 50W
- Pump has a pre-wired safety switch
- Pre-wired safety switch 230V, 3.0A max.

ELECTRICAL CONNECTION:

Brown: Live
Blue: Neutral
Green/yellow: Earth
2 x Black: Safety switch

ACCESSORIES:

- Acid Neutraliser



Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, we reserve the right to change specifications at any time.

For further information please visit
www.aspenpumps.com
or contact +44 (0)1323 848842

designed by engineers for engineers